


ORELUBE ET-2F Grease

Food Grade Synthetic Lubricating Grease



The Orelube Corporation

Specialty Industrial Lubricants Since 1958

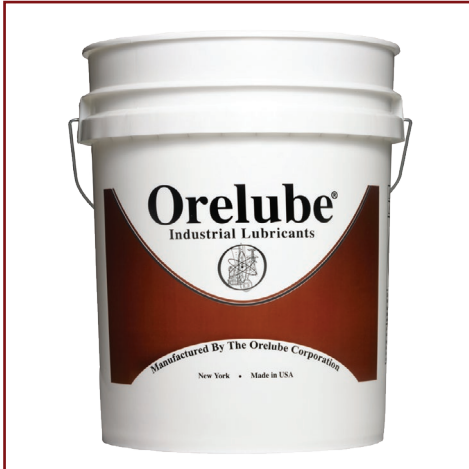

ET-2F is non-toxic, food grade EP grease manufactured using synthetic PAO fluid thickened with Aluminum complex soap.

NSF Registered (No. 137001) H1 Aluminum complex clear grease for the lubrication of machinery used to produce, process, package and/or transport food, beverage and pharmaceuticals where incidental contact with product may occur.

All the components in ET-2F are in accordance with FDA regulation 21 CFR 178.3570 – Lubricants with incidental food contact.

- EP and wear preventive properties
- Wide operating temperature range
- Superior water resistance
- High dropping point
- Mechanical (shear) stability when worked maintains consistency

CONTAINERS ■■■



ET-2F Pail
(35 Lb - 15.9 Kg)



ET-2F Keg
(120 Lb - 54.4 Kg)



ET-2F Drum
(400 Lb - 181.4 Kg)


TYPICAL PROPERTIES

NLGI Grade	1
Color	Translucent
Operating Temperature Range	-40 to 400 F
Penetration, ASTM D217	
Worked, 60 strokes	325
Dropping Point, ASTM D2265, F	550
Base Oil Viscosity, ASTM D445	
cSt @ 40 C	101.3
Copper Corrosion, ASTM D130	
24 hrs. @ 100 C	1a
4-Ball EP, ASTM D2596	
Weld load, kg	315
4-Ball Wear, ASTM D2266	
167 F, 40 kg, 1200 rpm, 1 hr.	
Scar diameter, mm	0.51

CERTIFICATIONS ■■■



APPLICATIONS ■■■



The Orelube Corporation

Specialty Industrial Lubricants Since 1958

The Orelube Corporation
20 Sawgrass Drive
Bellport, NY 11713
USA

Phone: +1 800.645.9124
+1 631.205.9700
Fax: +1 631.205.9797
Website: www.orelube.com



NSF-ISR

Registered
to ISO 9001